

TELESCOPIC BOOM | T65D



EVEN HIGHER STANDARDS



PLATFORM HEIGHT
65ft 4in

PLATFORM CAPACITY
1,000lbs

PLATFORM REACH
56ft 6in


HIGHER STANDARDS OF PERFORMANCE

The ability to fine tune function speeds gives operators precise control of their machine's positioning, even in the tightest spaces.




EXTRA CAPACITY

A dual zone restricted platform working load allows safe handling up to 1,000lbs.

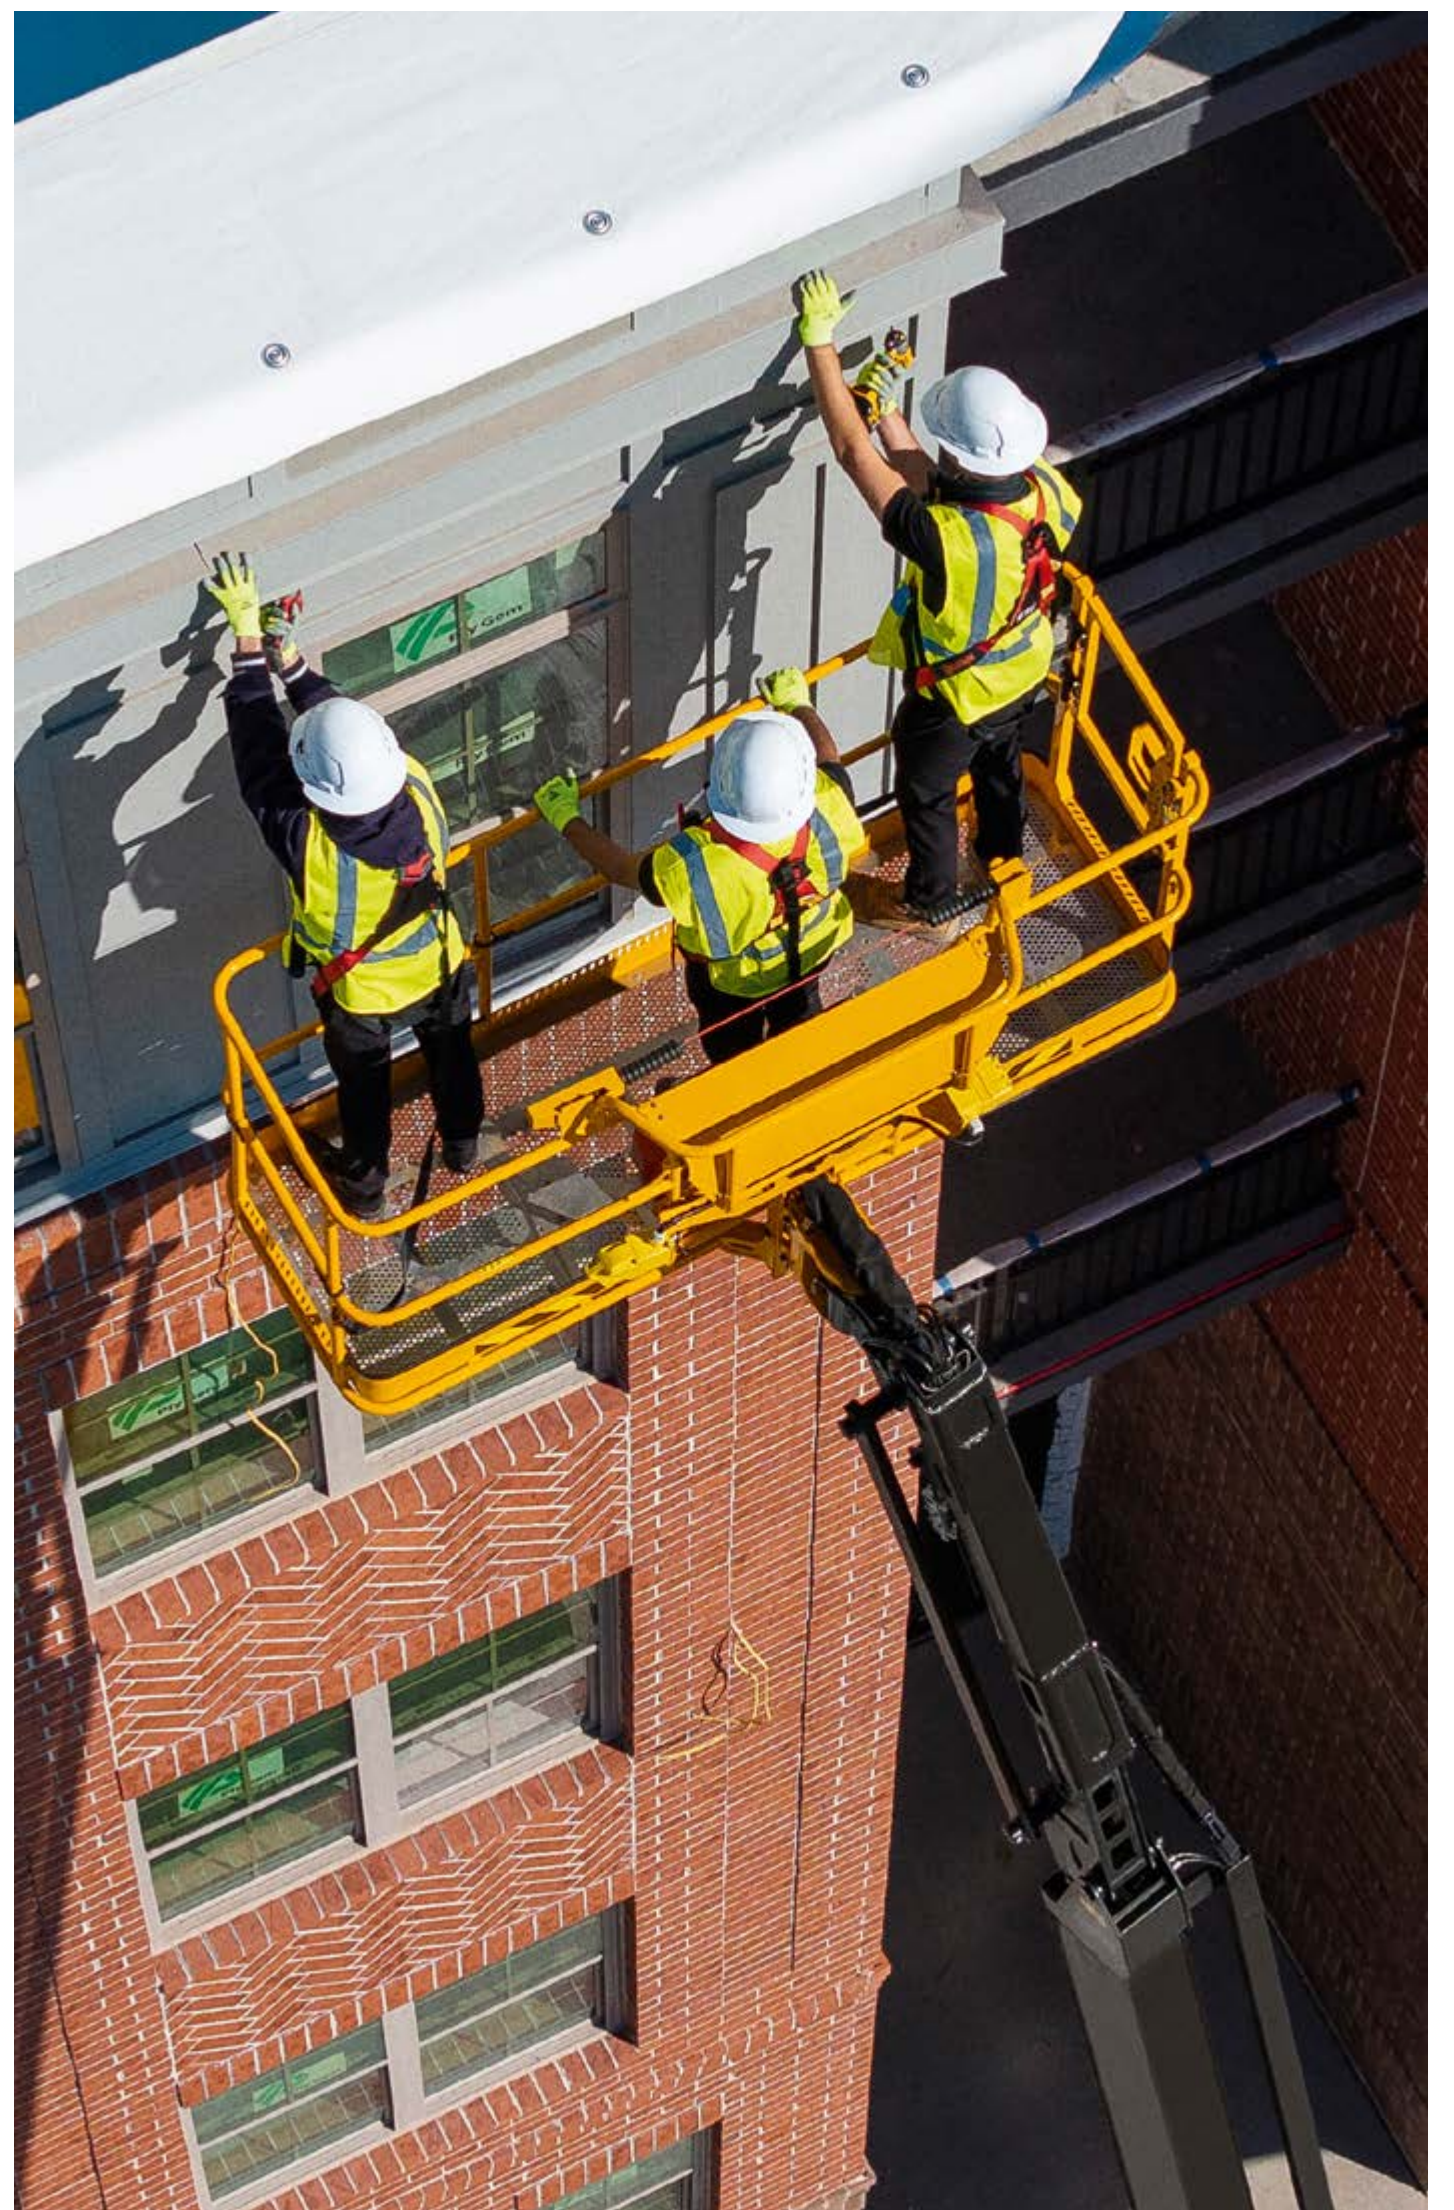

HIGHER STANDARDS OF RELIABILITY

Our first ever diesel telescopic boom has a solid cast counterweight, providing greater strength and stability to balance loads in the basket.

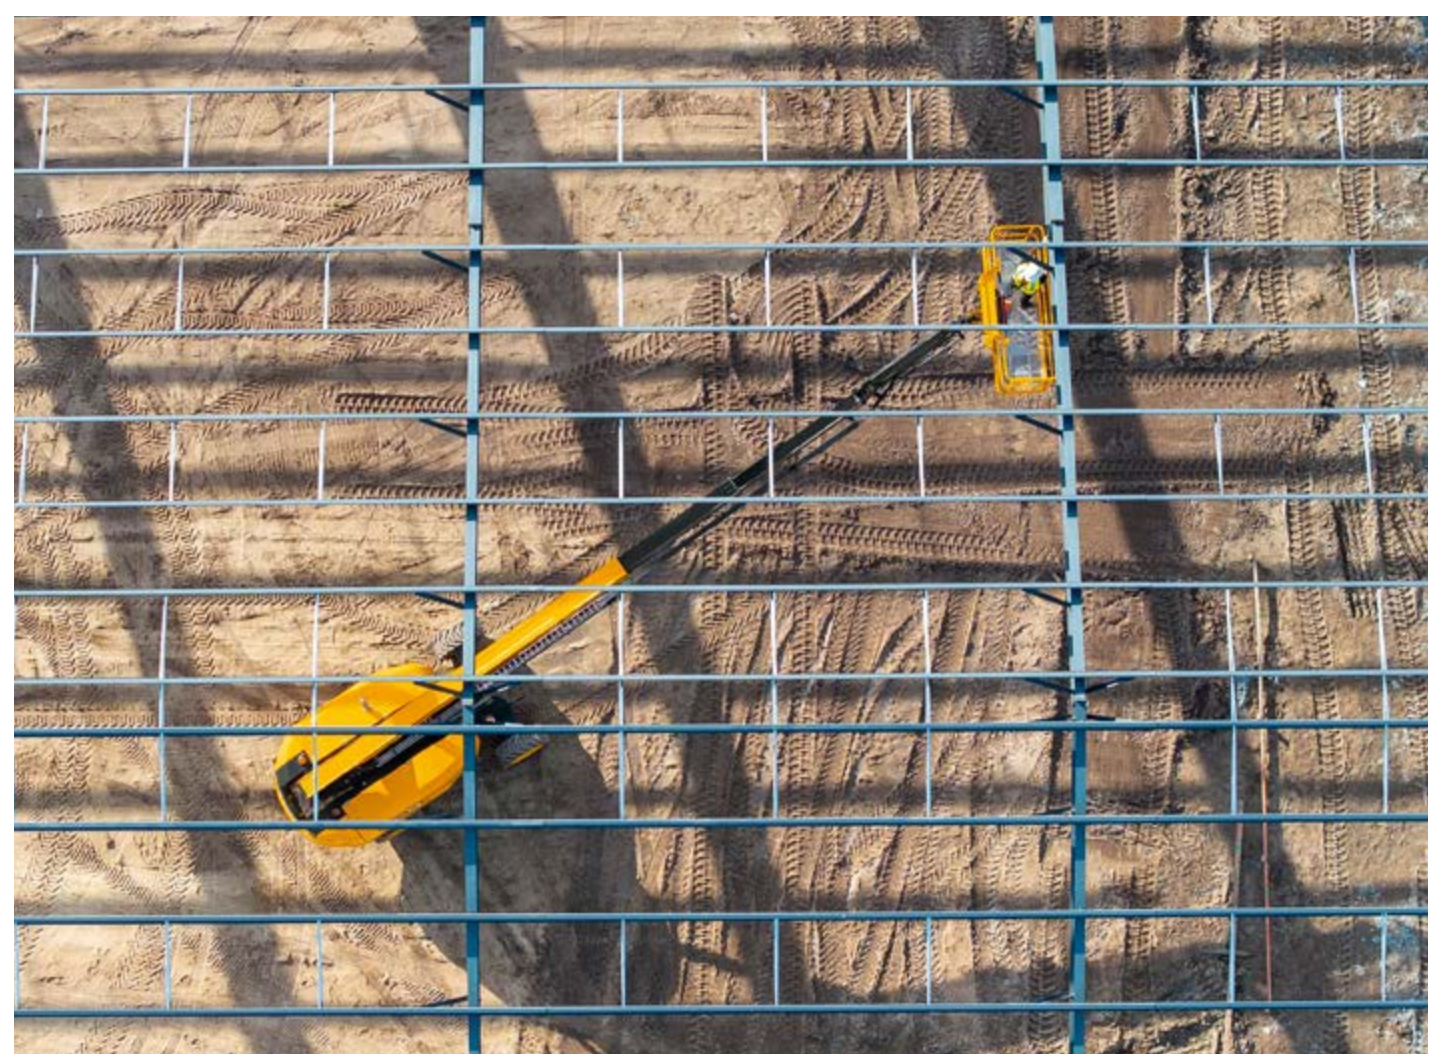

IP67-RATED WIRING

Carefully routed waterproof wiring prevents machine damage, providing greater uptime and reliability.


HIGHER STANDARDS OF EFFICIENCY

The new T65D is powered by our award-winning JCB ECOMAX 444 engine, renowned for its high torque, low revs and efficient fuel usage.



JCB LIVELINK

Fitted as standard, our LiveLink telematics system allows operators to remotely monitor machine performance 24/7.

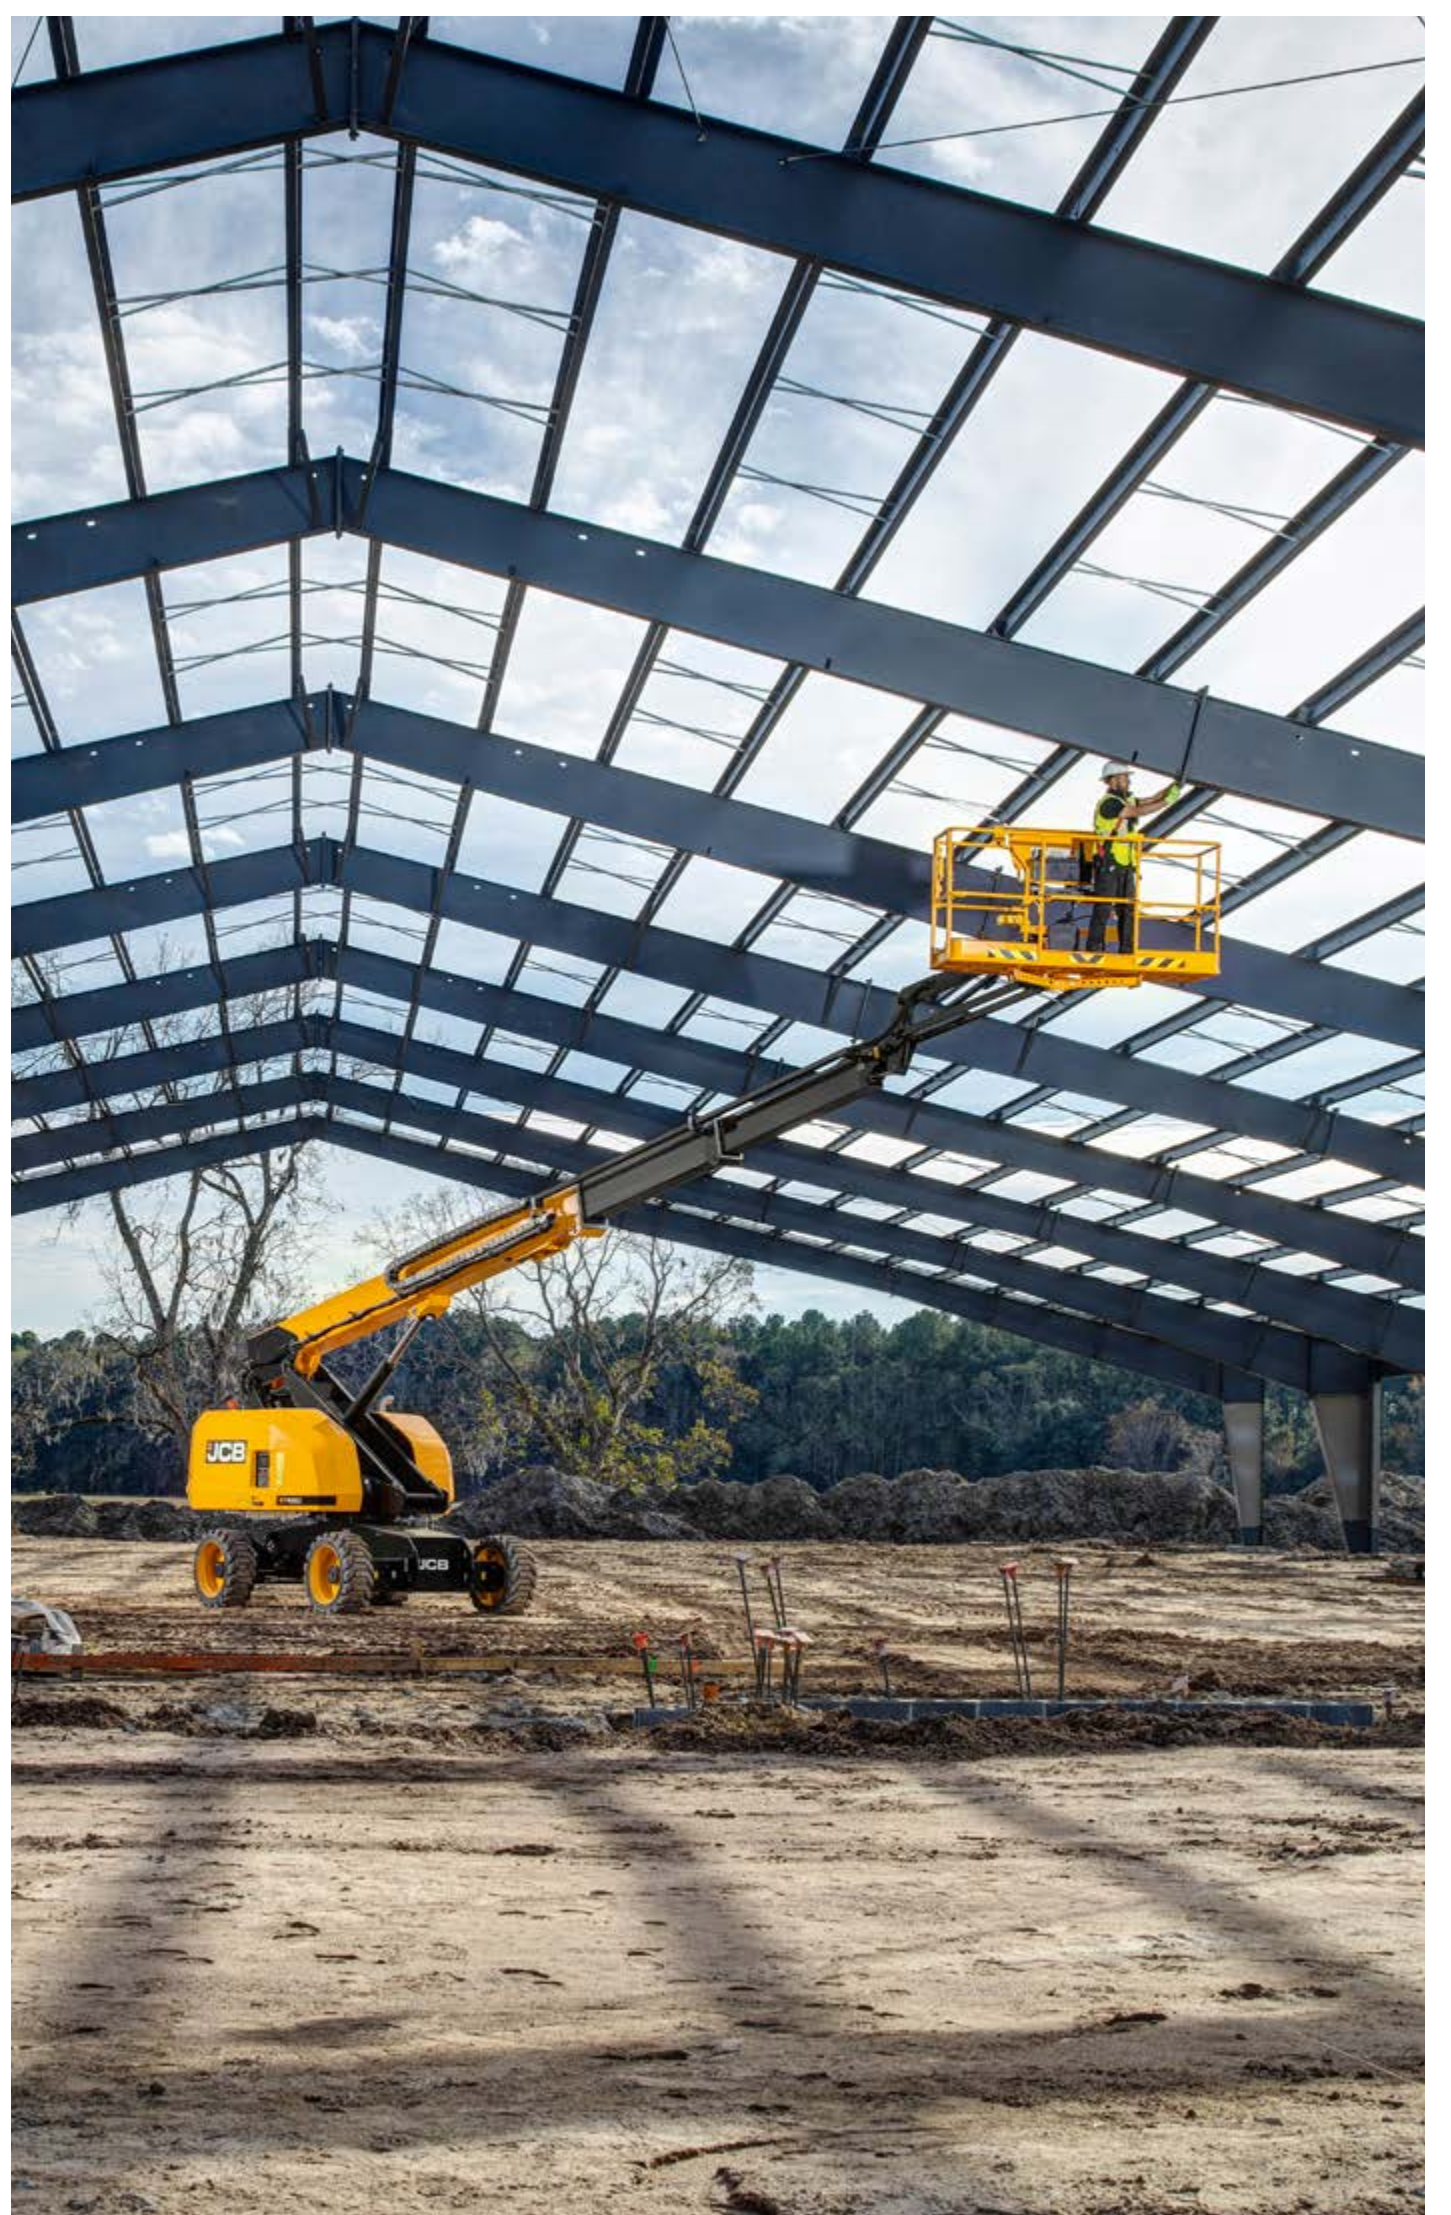

HIGHER STANDARDS OF COMFORT

Intuitive controls, oscillating steering axle, improved joystick ergonomics and function speed control allow fatigue-free, productive working at height.




PEACE OF MIND

A 5" color platform display and 7" touchscreen base display provide operators with live data at their fingertips.


HIGHER STANDARDS OF SAFETY

Enhanced safety features, including a secondary guarding system, defend against overhead crush hazards, protecting the operator at all times.

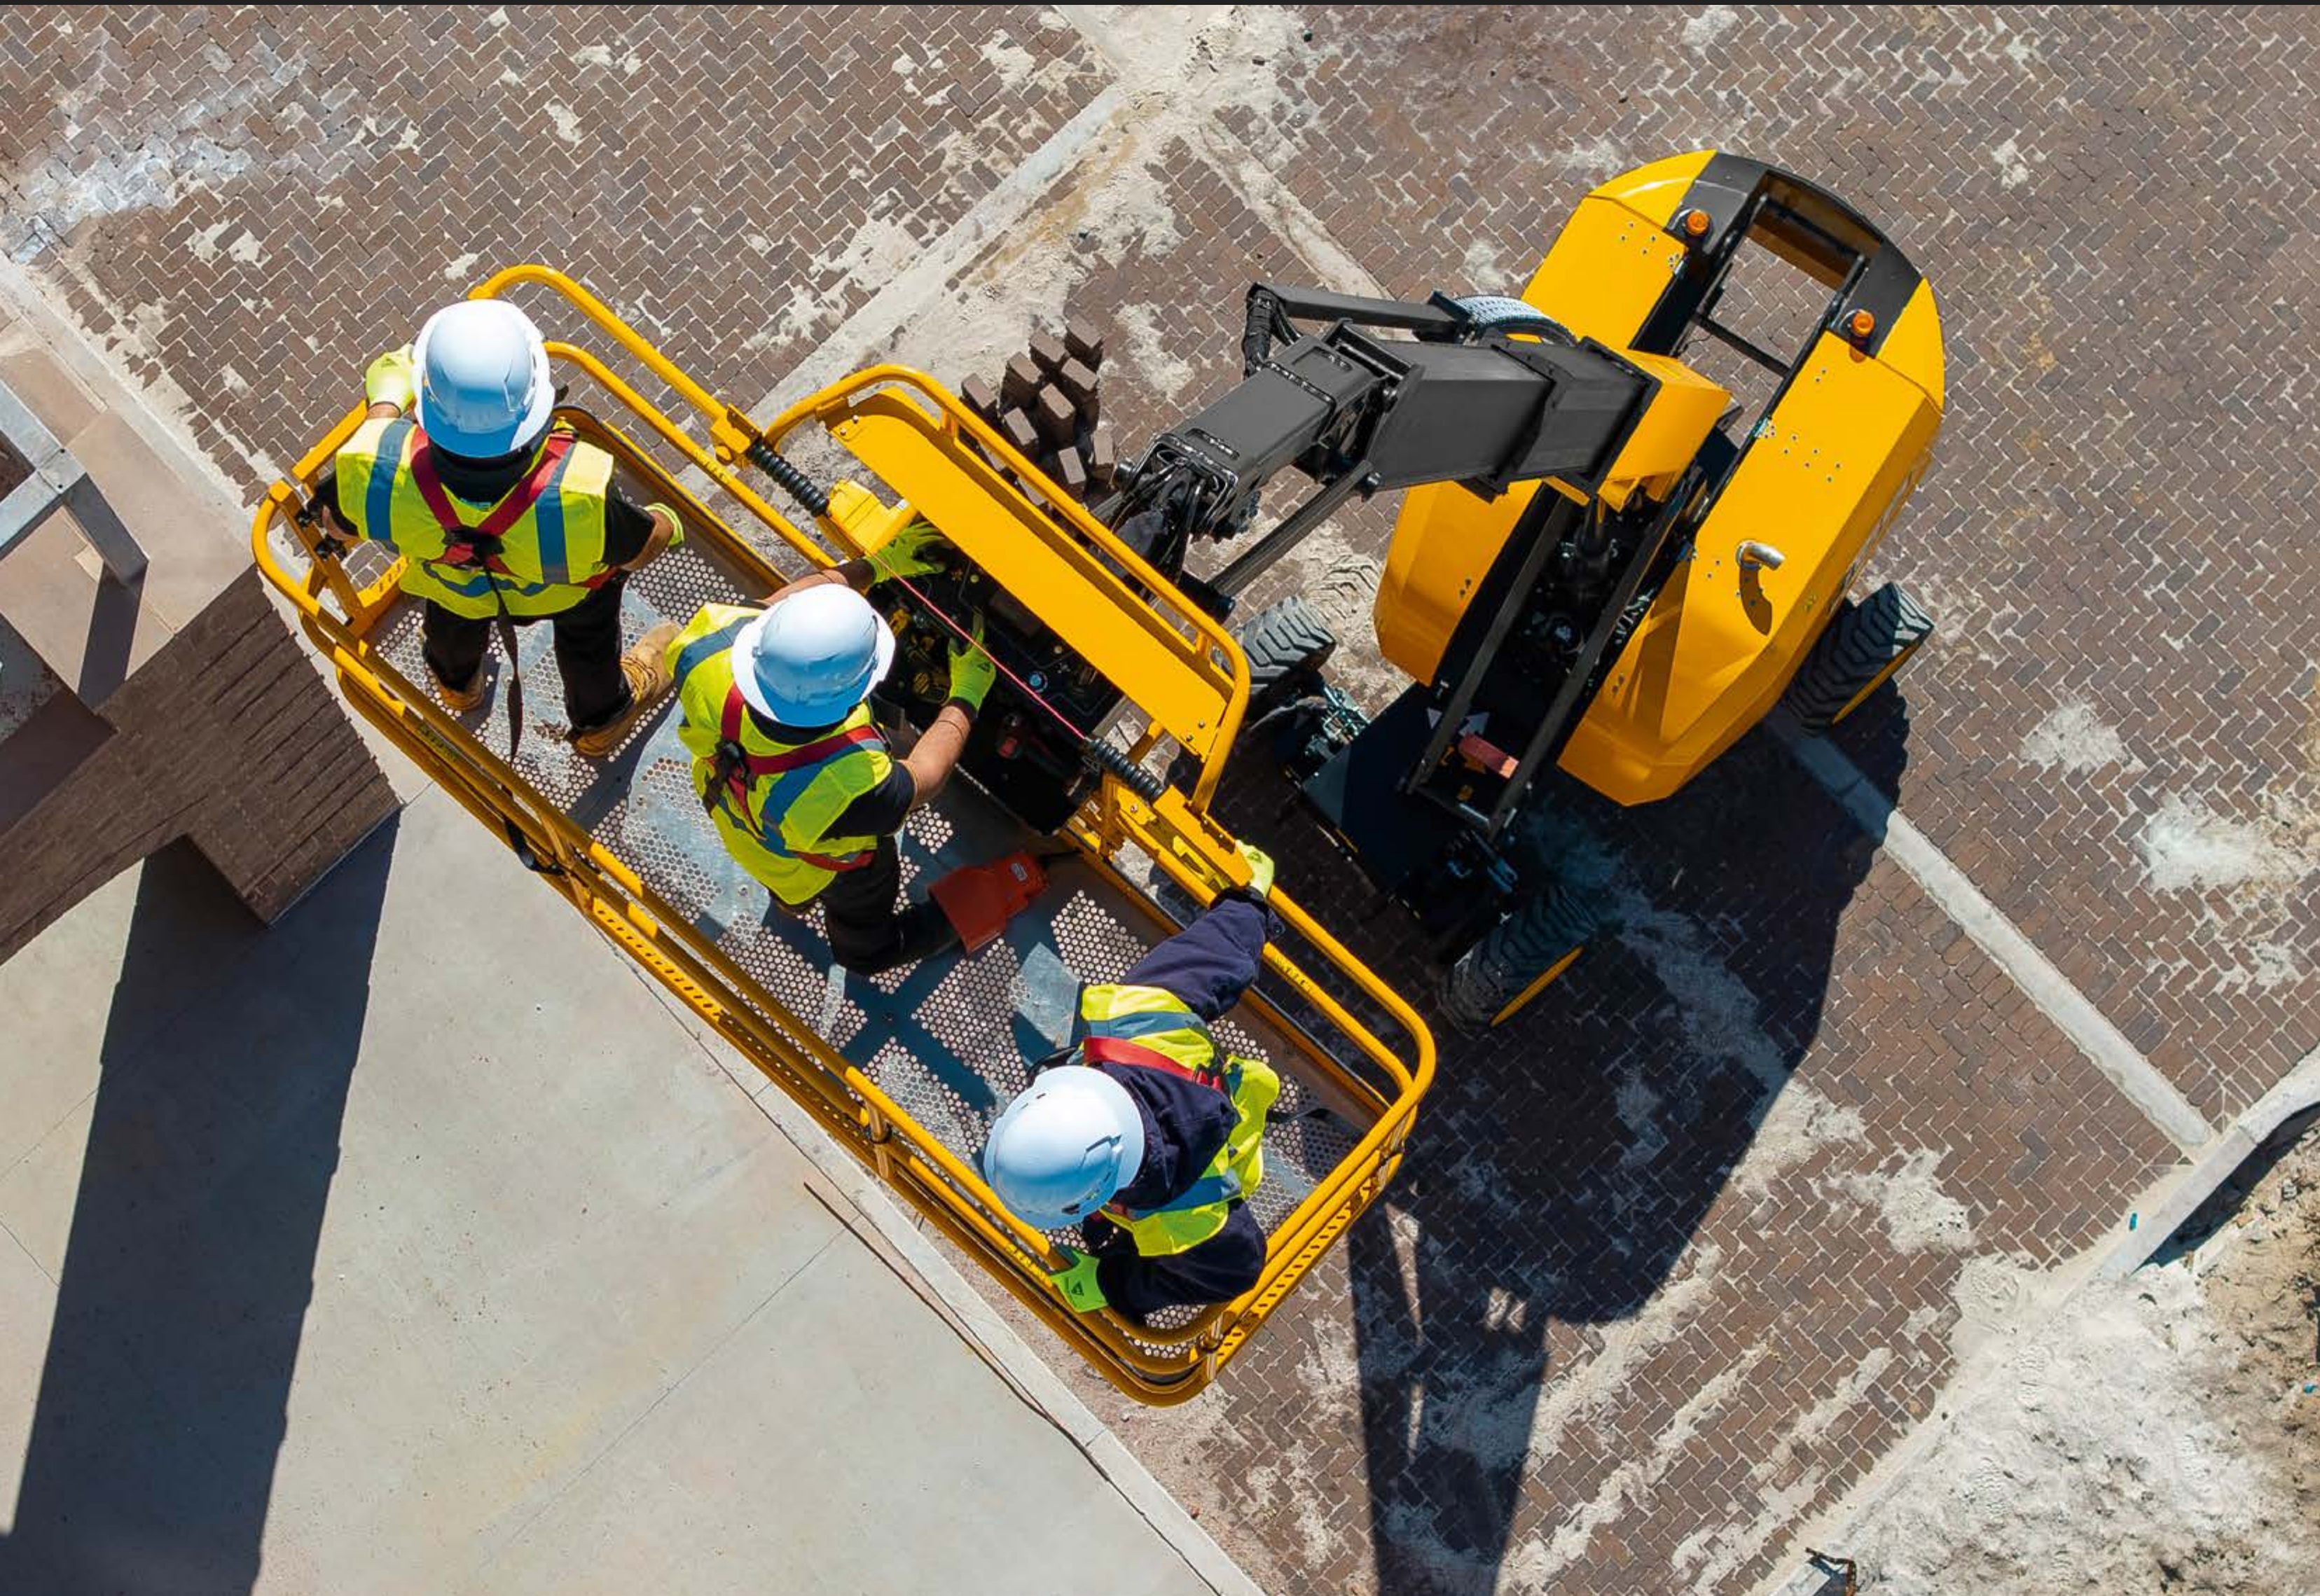


SAFER BY DESIGN

Foam filled tyres, fitted as standard, improve grip and stability when working in rough, uneven environments.

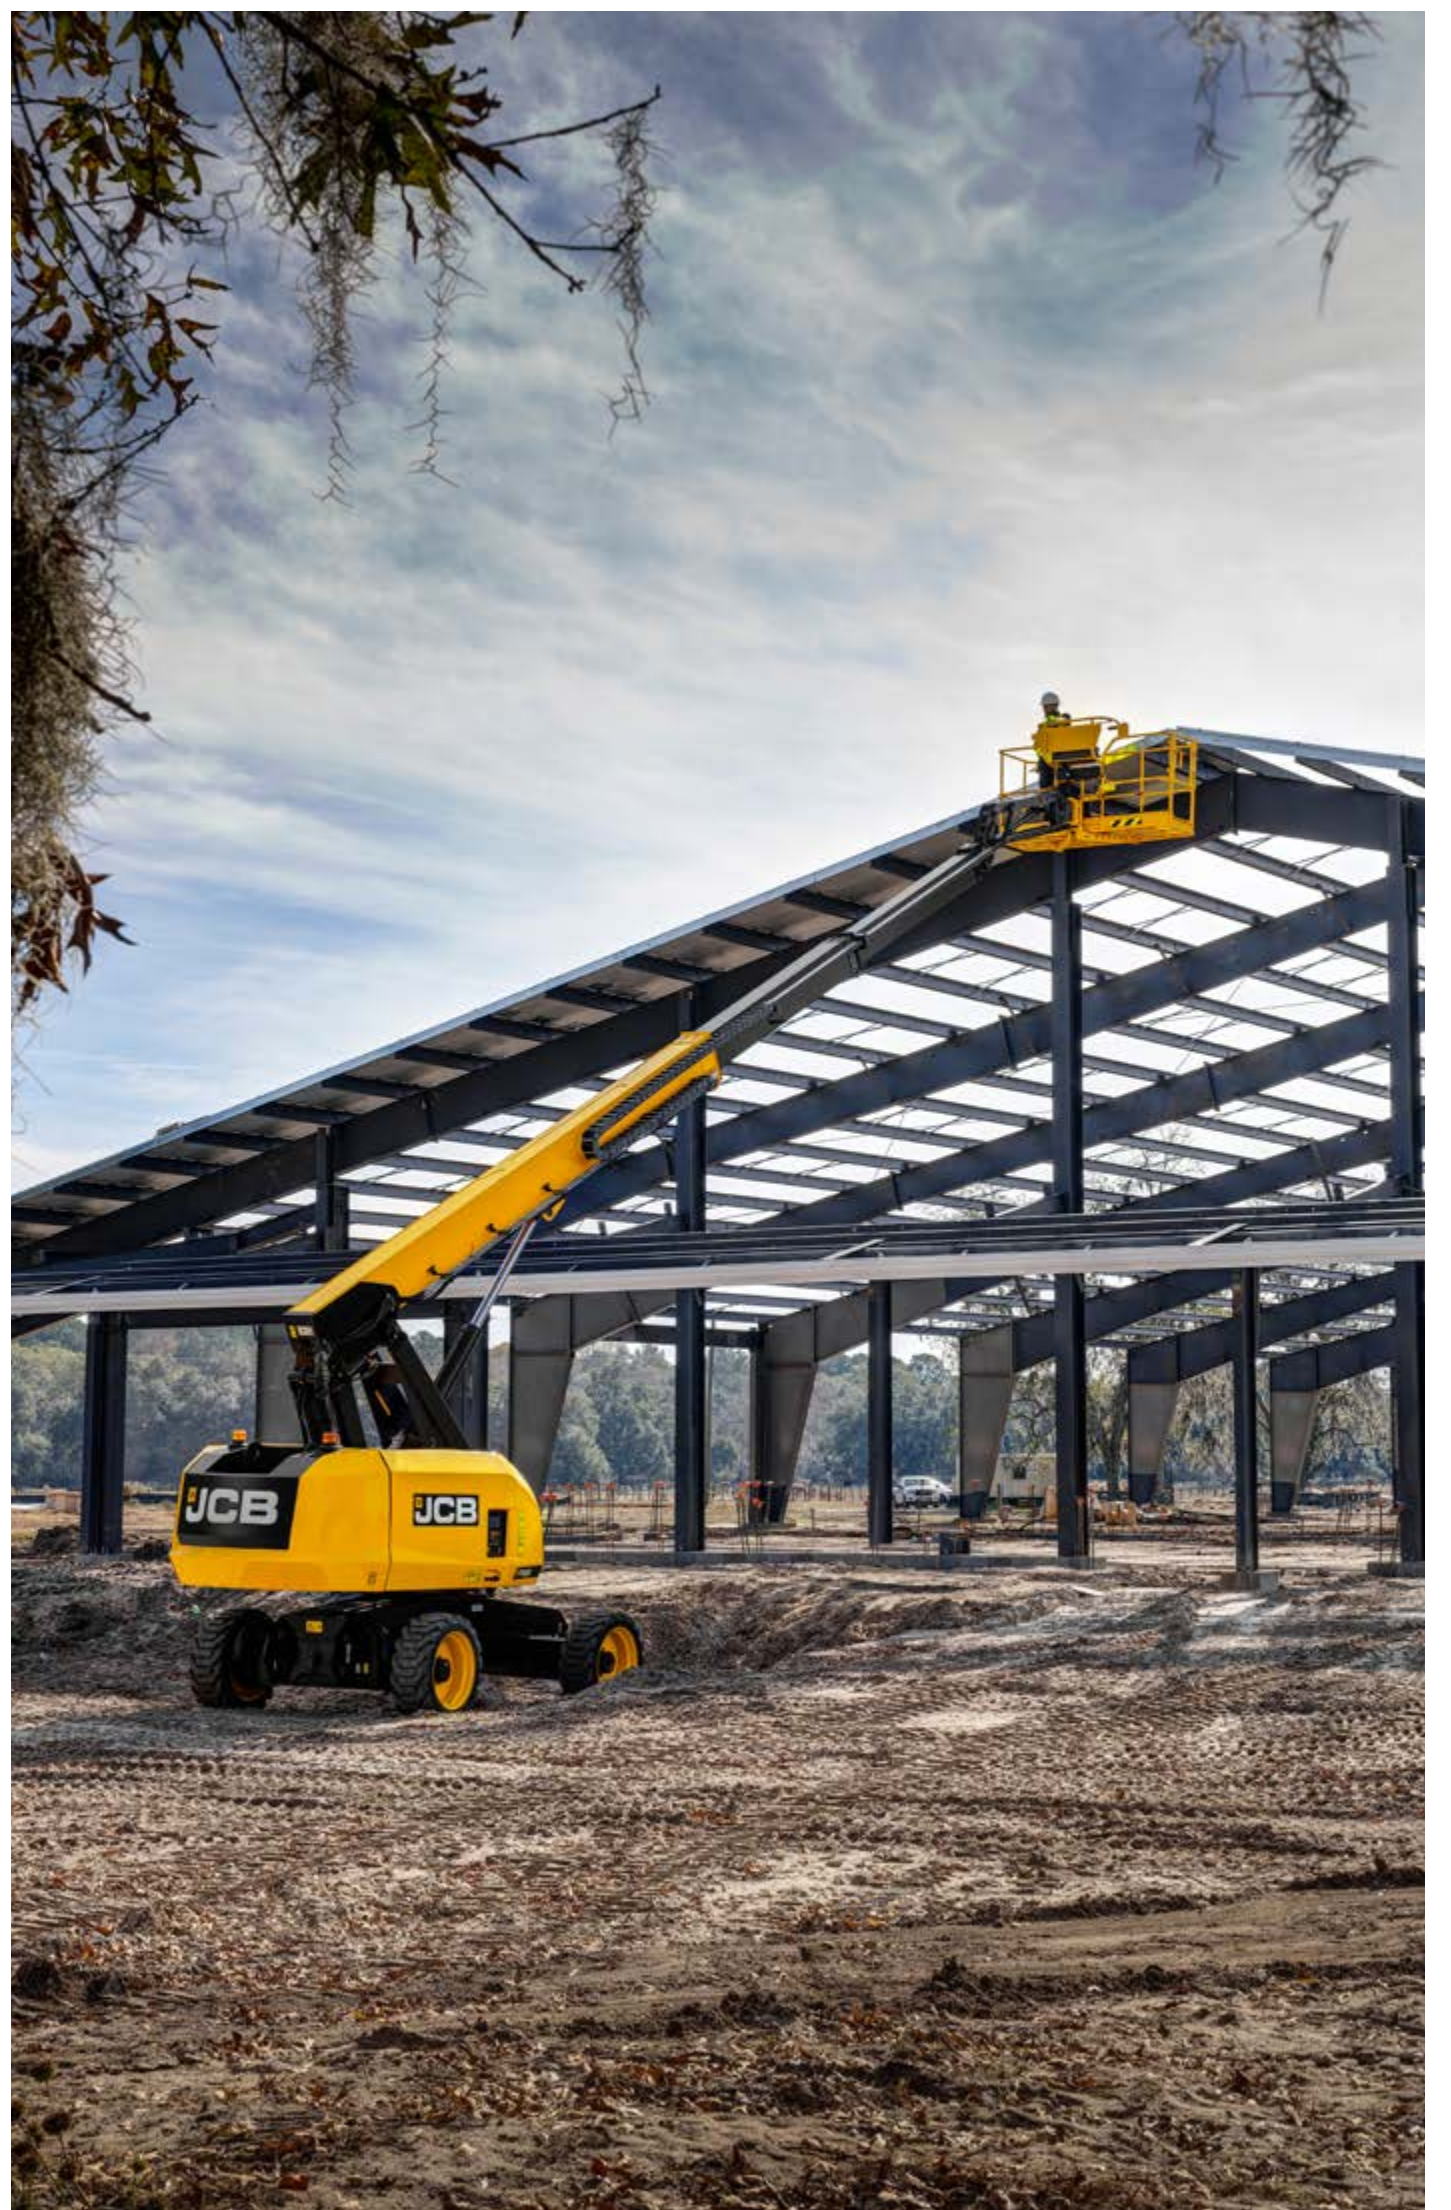

TELESCOPIC BOOM | T65D

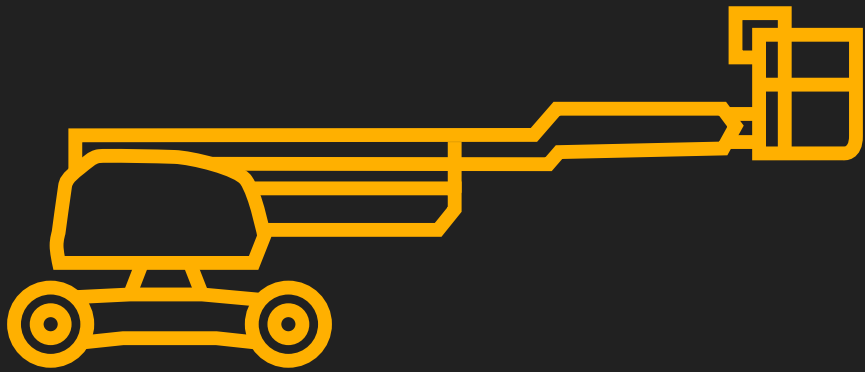

SPECIFICATION

MODEL		T65D
Weight	lbs	28,171*
Stowed height	ft-in	9-3
Stowed length	ft-in	33-1
Stowed width	ft-in	7-10
Max platform capacity	lbs	1,000
Max platform height	ft-in	65-4
Max horizontal outreach	ft-in	56-6
Machine rotation	degrees	360

*Machine mass may vary based on machine configuration.



STANDARD FEATURES

- Dual Zone operating envelope
- Color display screens
- Secondary guarding system
- JCB ECOMAX 444 engine
- 8ft platform with 3 way entry
- Oscilating front axle
- 4 wheel drive
- Rough terrain foam filled tires
- Emergency lowering function
- LiveLink telematics



EVEN HIGHER STANDARDS

FIND OUT MORE



REQUEST A QUOTE



www.jcb.com