

TANDEM VIBRATORY ROLLERS | CT160 / 260 / 380 / 430



EASY — IN A — HARD WORLD



OPERATING WEIGHT
3770 - 9921lb
(1710 - 4500kg)

ENGINE POWER
19.0 - 48.9hp
(14.2 - 36.5kW)

DRUM WIDTH
2.7 - 4.7ft
(800 - 1400mm)


EASY TO BE PRODUCTIVE.

The CT range of tandem rollers feature high centrifugal forces and static linear loads for the best performance – dynamically or statically – on aggregates or asphalt.



PROVEN PERFORMANCE

The simple drum offset increases the efficiency and the chamfered drum edges create a smooth finish. The pressurised water sprinkler with upward facing nozzles ensures sufficient water supply on the drums.

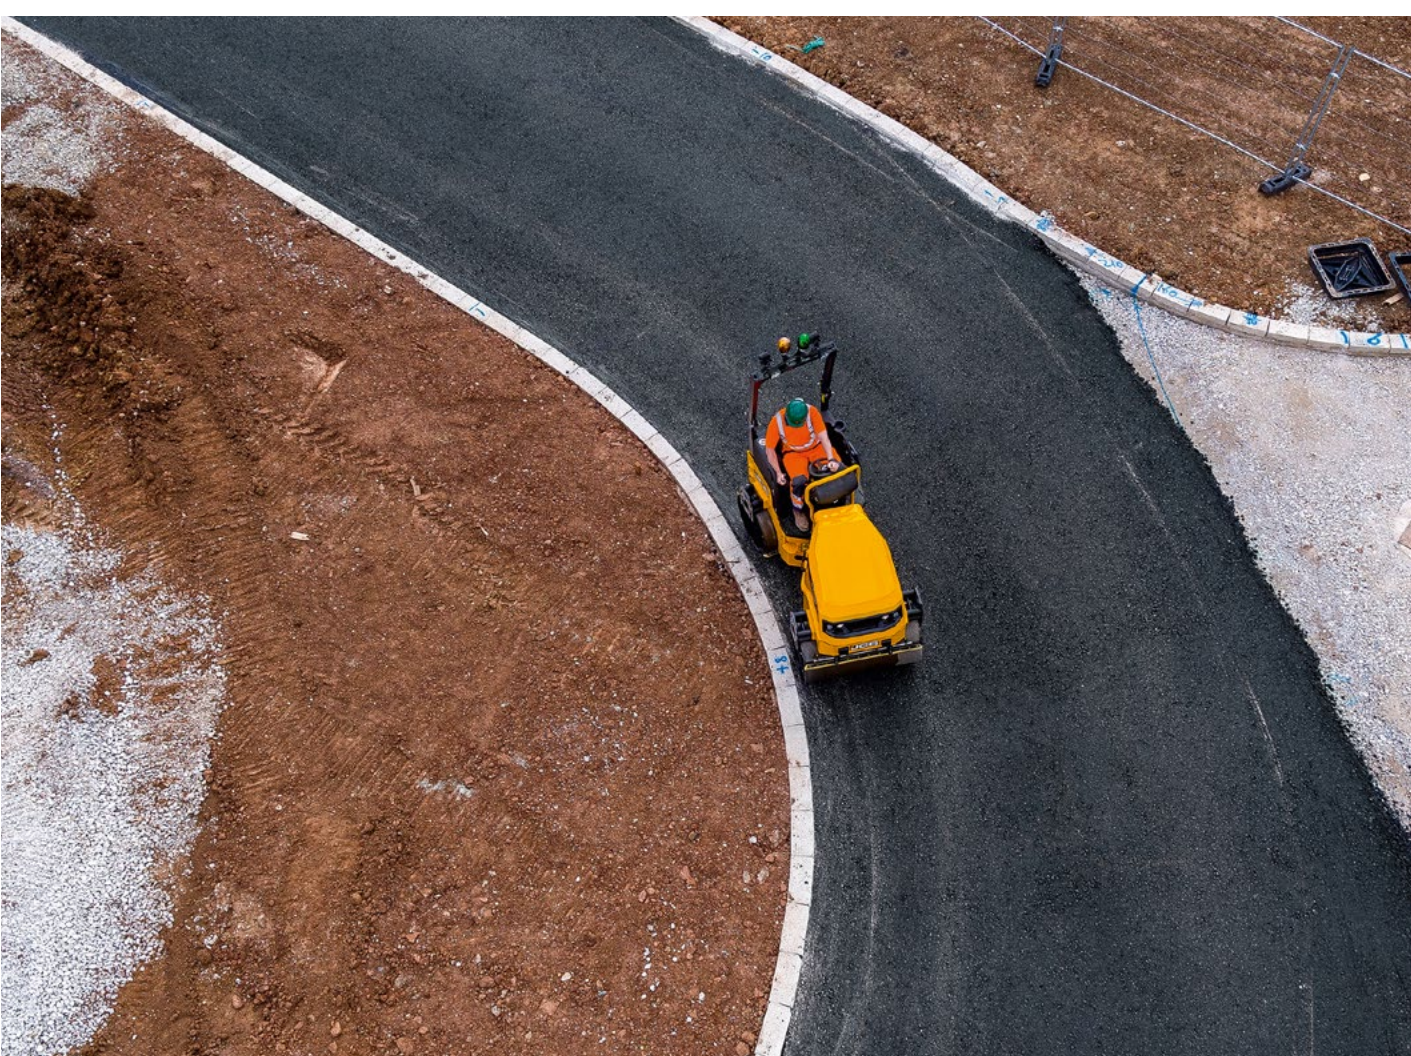

EASY AND EFFICIENT.

The JCB CT tandem rollers have been designed to be easy to use, easy to be productive, easy to keep safe and secure and easy to service.



BUILT FOR EFFICIENCY

Our CT range all feature EU Stage V and EPA T4F engines. The CT160 & 260 feature a Kubota engine, whereas the CT380 & 430 use a Kohler engine.

EASY TO USE.

With a simple, intuitive control layout and superior operator comfort, our new tandem rollers make working not just easy but also a pleasure.



EASY TO CONTROL

A responsive directional drive lever makes for smooth operation, while our CT control panel has easy to understand work modes and easy to use switches.



EASY TO SERVICE.

Easy access engine service points, longer service intervals and many zero maintenance parts, our tandem rollers are easy to maintain.



EASY TO ACCESS

The well-protected radiator position at the centre of the machine makes it easy to clean and creates easy access to the battery and service points.

EASY TO KEEP SAFE AND SECURE.

With JCB's LiveLink telematics system as standard, plus many built-in safety features, the new CT tandem rollers give you complete peace of mind.



SAFE TO USE

The operator-present seat switch provides safety when mobile but has a timed cut-out delay, which still allows free movement on the seat.



TANDEM VIBRATORY ROLLERS | CT160 / 260 / 380 / 430



SPECIFICATION.

MODEL	CT160	CT260	CT380	CT430
Operating weight lb (kg)	3770-3946 (1710-1790)	5335-5644 (2420-2560)	9039 (4100)	9921 (4500)
Drum width ft-in (mm)	2.7 - 3.3 (800 - 1000)	3.3-3.11 (1000 - 1200)	4.3 (1300)	4.7 (1400)
Static linear load lb/in (front/rear) (kg/cm)	47.0 - 63.7 (8.4 - 11.4)	58.9 - 86.1 (10.5 - 12.3)	88.2 (15.8)	90.0 (16.1)
Engine power hp (kW)	19.0 (14.2)	24.4 (18.2)	48.9 (36.5)	48.9 (36.5)
Frequency vmp (Hz)	3000 - 3960 (50 - 66)	3000 - 3960 (50 - 66)	3000 - 3600 (50 - 60)	3000 - 3600 (50 - 60)
Centrifugal force ibf (kN)	2452 - 4297 (10.9 - 19.1)	5310 - 9247 (26.3 - 41.1)	9217 - 13264 (41 - 59)	9892 - 14163 (44 - 63)



STANDARD FEATURES.

- 2 Year LiveLink telematic contract
 - Maintenance free centre joint
 - High visibility tapered front frame
 - EU Stage V & EPA T4F compliant engine
 - Upward facing spray nozzles
- Simple and intuitive control layout
 - Integrated vandal cover
 - Automatic vibration control
 - 2.2 - 2.4in (56-60mm) CT160 / 260 and 3.1in (80mm) CT380 / 430 drum offset



EASY IN A HARD WORLD.

FIND OUT MORE

REQUEST A QUOTE



www.jcb.com

